


# ASSEMBLY & INSTALLATION INSTRUCTIONS

## Enfield Console Table


### 7460.100 With Raised Wood Panels 7460.200 With Cast Grilles




CONSOLE TABLE	VANITY TOP-GRANITE	RECOMMENDED SINK
7460.100	6860.725 Bakersfield White or 6860.722 Autumn Spray	0740 Enfield
7460.200		

Thank you for selecting our products...products which have been the benchmarks of fine quality for over 100 years. To help insure that the installation process will proceed smoothly, please read these instructions carefully before you begin. Also, review the recommended tools and materials list; carefully unpack and examine your new plumbing fixture. To maintain the beauty of the finish, avoid placing the furniture in direct sunlight, as sunlight causes fading. Also avoid extreme changes in temperature by arranging furniture away from radiators, heat and air vents, and air conditioning units. Avoid placing furniture directly under windows.

### Recommended Tools & Materials

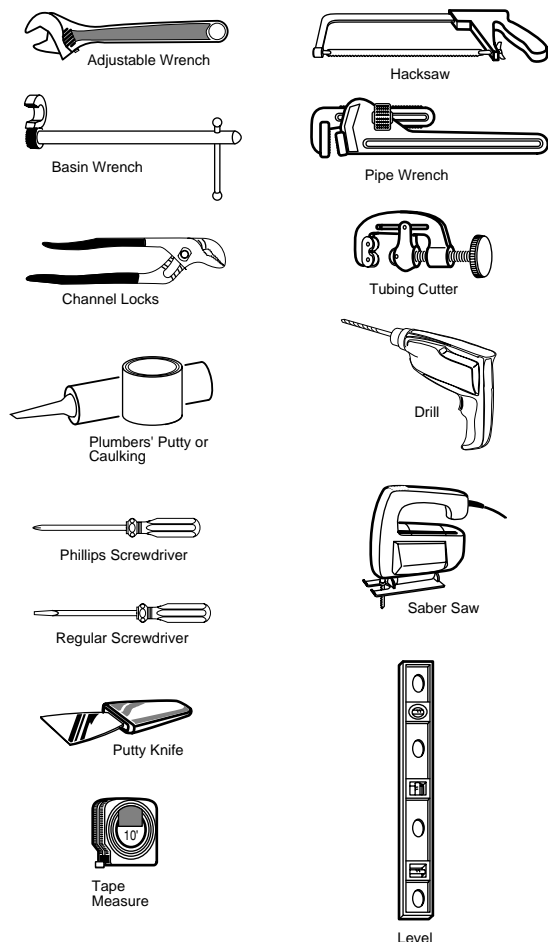

### Roughing-in Dimensions

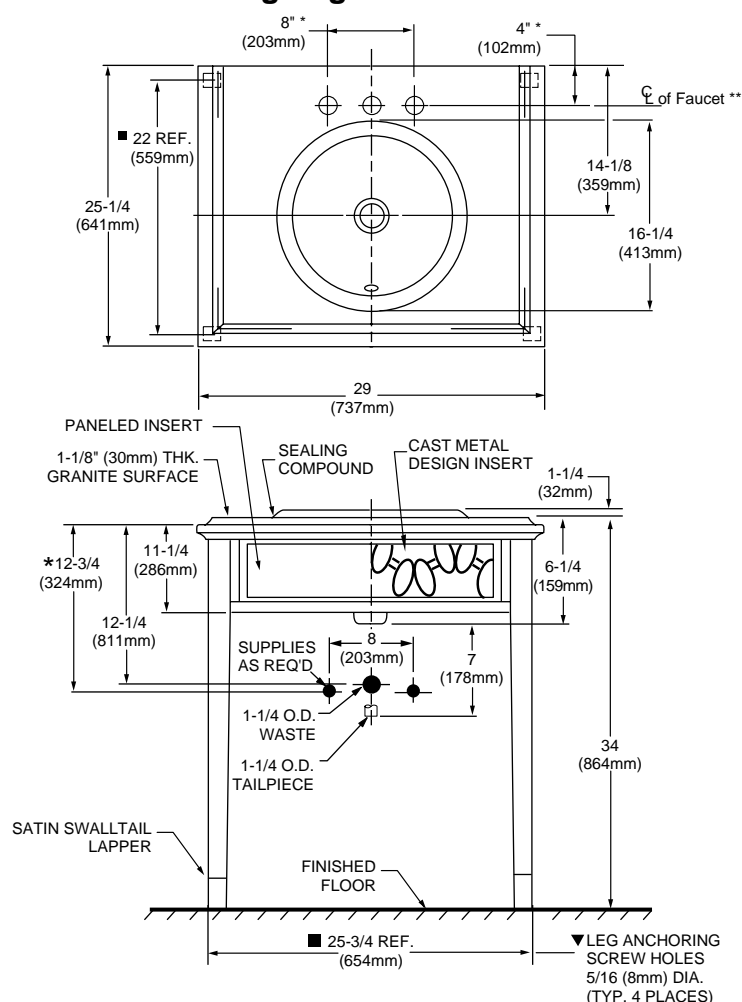

## CONSOLE TABLE INSTALLATION



Identify desired location of the console table.

Provide suitable reinforcement required for anchoring the vanity to the wall. Centerline of reinforcement should be 30" up from the floor (see Figure 1).

Rough in supply lines and waste per rough in dimensions.

Drill at least two 3/8" O.D. anchoring holes through the rear stringer of the console table at 2-1/2" down from the top of the table (see Figure 2).

Move the vanity into place and level with the adjustable glides on the bottom of the feet. The glides can be adjusted outward up to 3/8". Anchor it to the wall through the 2 anchoring holes in the rear of the vanity (see Figure 2). Do not overtighten to prevent cracking the rear stringer.

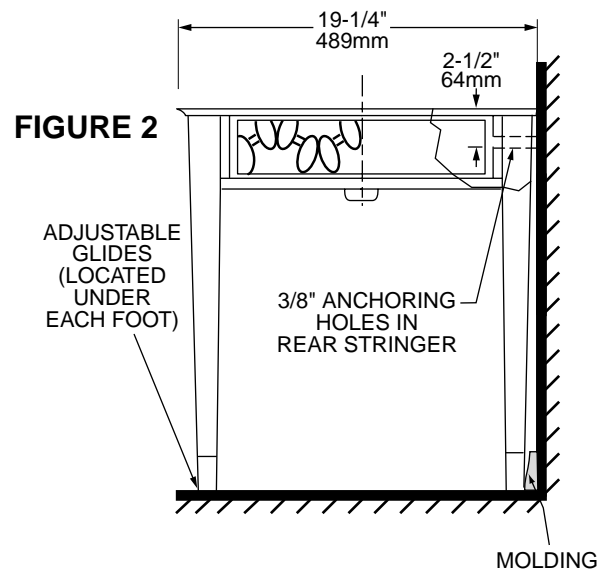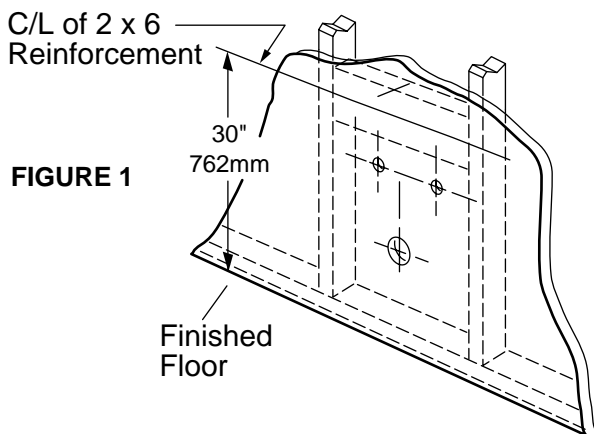


## VANITY TOP, SINK, AND FAUCET INSTALLATION

Install the faucet onto the granite top per the manufacturer's instructions.


**Two people recommended for this installation**

Apply a continuous 1/8" bead of silicone sealant 1" from the inside edge of the console. Carefully set the stone top on the console table. Be sure that the top is centered on the table.

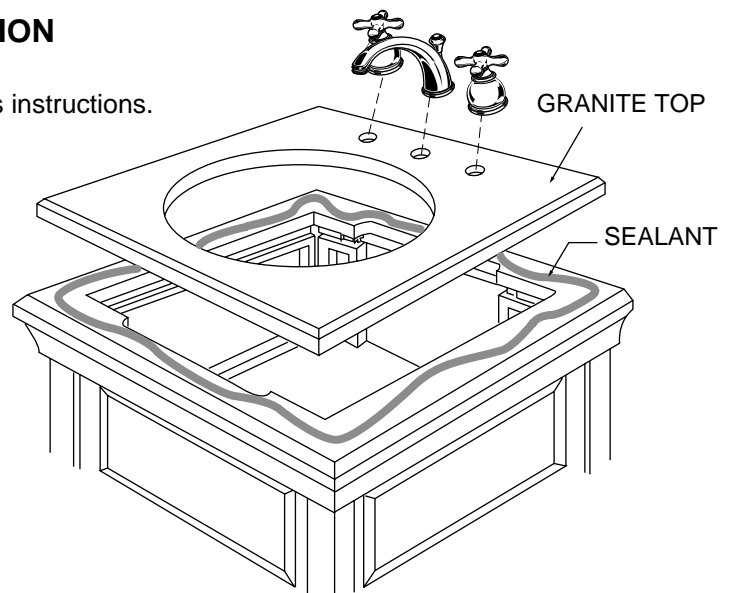


Use mineral spirits to remove excess silicone from the console and stone top.

Mount the drain assembly to the sink. Be certain to apply a bead of sealing putty on the underside of the drain (area "A") in order to ensure a watertight seal between the sink and drain. Remove excess putty.

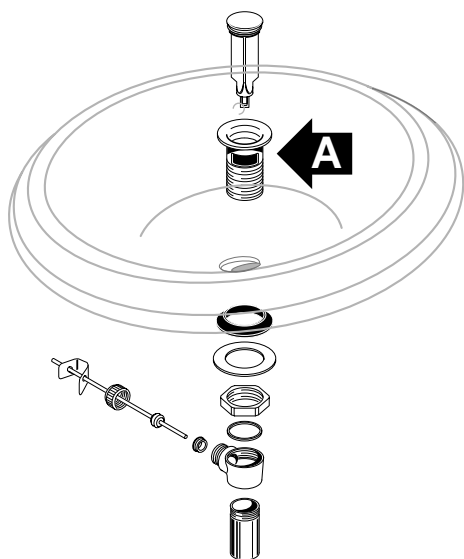


Install the sink on the granite top using sealant. Add or remove excess compound around the base of sink rim. Form fillet the sealant with wet finger or sponge.

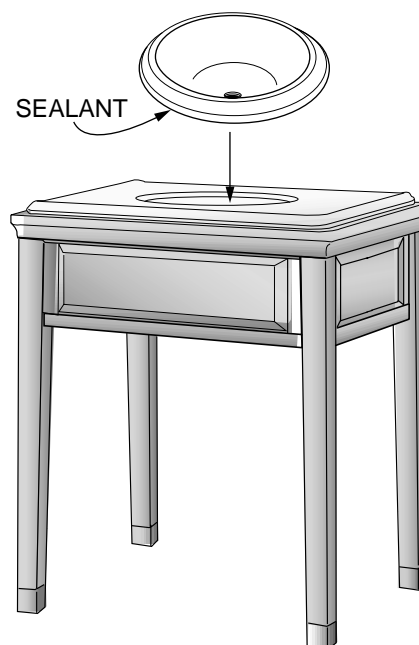

After installing the sink, connect the trap to the drain assembly and hand tighten to check alignment. It may be necessary to cut off part of the tailpiece (area "A") or part of the horizontal leg of the trap (area "B").

Connect hot and cold supply lines to the shut off valves. Tighten trap joints for watertight assembly.



## POST INSTALLATION CLEAN-UP

Remove all construction debris from the sink and console top. Do not use wire brushes or any other metal implement on sink and console top surfaces. Post installation clean-up generally can be completed using warm water and liquid dishwashing detergent. Stubborn dirt or stains may be removed using franular Spic and Span® mixed with water. Painter's naphtha can be used to remove excess adhesives and/or wet oil-base paint.

## Care and Cleaning of the Console Table

Clean the product by using soft, slightly damp cloth. Buff the product by using a soft dry cloth. Avoid using silicone cleaners and waxes.

Clean up excess water and spills immediately. Use a blotting rather than a wiping action. Water left over a long period of time will cause white spots in the finish.

NOTE: Please note that some chemicals may damage the finish. Take care to avoid the following: iodine, hair dye, after shave lotion, shaving cream, alcohol, perfume, Lestoil®, Lysol Tub and Tile Cleaner®, Lysol Spray Disinfectant®, Dow Disinfectant®, acetone, paint remover, Formula 409®, Tile-X®, and Nair®.

## Care and Cleaning of the Granite Vanity Top

A solution of 1/4 part vinegar and 3/4 parts water is excellent for general cleaning of your stone table top. Do not use abrasive or thick cream cleaning solutions. Common stains such as red wine or mustard should not remain on the stone top for an extended length of time. For additional protection, commercial sealers for marble are available.

## REPAIR PARTS

730679-0070A	Adjustable Threaded Foot Glide (4 per pack)
752686-3300A	Cherry Wood Panel Kit (2 side and 1 front panel and screws)
752686-3340A	Maplewood Panel Kit (2 side and 1 front panel and screws)
752679-0070A	Cast Grille Kit (2 side and 1 front grille and screws)

## AMERICAN-STANDARD GRANITE/MARBLE TABLE TOP WARRANTY

If inspection of this American-Standard plumbing product, within one year after its initial purchase, confirms that it is defective in materials or workmanship, American-Standard will repair or, at its option, exchange the product for a similar model. Variations in shading, veining, and texture which may result from natural characteristics of stone and as such are not defects and are not covered by this warranty.

This warranty applies only to the original purchaser and installation of these products.

This limited warranty does not apply to local building code compliance. Since local building codes vary considerably, the purchaser of this product should check with a local building or plumbing contractor to insure local code compliance before installation.

This warranty shall be void if the product has been moved from its initial place of installation; if it has been subjected to faulty maintenance, abuse, misuse, accident or other damages; if it was not installed in accordance with American-Standard's instructions; or if it has been modified in a manner inconsistent with the product as shipped by American-Standard.

American-Standard's option to repair or exchange the product under this warranty does not cover any labor or other costs of removal or installation, nor shall American-Standard be responsible for any other incidental or consequential damages attributable to a product defect or to the repair or exchange of a defective product, all of which are expressly excluded from this warranty. (Some states or provinces do not allow the exclusion or limitation of implied warranties, so this exclusion may not apply to you).

This warranty gives you specific legal rights. You may have other statutory rights that vary from state to state or province to province, in which case this warranty does not affect such statutory rights.

## AMERICAN-STANDARD WOOD FURNITURE WARRANTY

If inspection of this American-Standard plumbing product, within one year after its initial purchase, confirms that it is defective in materials or workmanship, American-Standard will repair or, at its option, exchange the product for a similar model. Variations in actual wood color and finishes which may result from natural characteristics of the wood, such as grain patterns, mineral streaks and the like, are not defects and are not covered by this warranty.

This warranty applies only to the original purchaser and installation of these products.

This limited warranty does not apply to local building code compliance. Since local building codes vary considerably, the purchaser of this product should check with a local building or plumbing contractor to insure local code compliance before installation.

This warranty shall be void if the product has been moved from its initial place of installation; if it has been subjected to faulty maintenance, abuse, misuse, accident or other damages; if it was not installed in accordance with American-Standard's instructions; or if it has been modified in a manner inconsistent with the product as shipped by American-Standard.

American-Standard's option to repair or exchange the product under this warranty does not cover any labor or other costs of removal or installation, nor shall American-Standard be responsible for any other incidental or consequential damages attributable to a product defect or to the repair or exchange of a defective product, all of which are expressly excluded from this warranty. (Some states or provinces do not allow the exclusion or limitation of implied warranties, so this exclusion may not apply to you).

This warranty gives you specific legal rights. You may have other statutory rights that vary from state to state or province to province, in which case this warranty does not affect such statutory rights.

### In the United States:

American Standard Inc.  
P.O. Box 6820  
Piscataway, New Jersey 08855  
Attention: Director of Consumer Affairs

For residents of the United States, warranty information  
may also be obtained by calling the following  
toll free number: (800) 442-1902

### In Canada:

American Standard  
2480 Stanfield Rd.  
Mississauga, Ontario  
Canada L4Y 1S2

Toll Free: (800) 387-0369

### In Mexico:

Customer Service Manager  
Ideal Standard, S.A. de C.V.  
Via Morelos #330  
Col. Santa Clara  
Ecatepec 55540 Edo. Mexico